

# **iSmartView**

**(For Android)**

# **User manual**

**(For B/L/H/M series)**

2013-02 REV1.0

## 1. iSmartView summary

iSmartView (for android) is an application software based on Android OS, suitable for android mobile phone or tablet PC, support android 2.3.0 and 4.0; The iSmartView has the following functions:

- ◆ Support B/L/H/M series ip camera;
- ◆ Support for view video, monitor sound, talk, PTZ control and snapshot etc;
- ◆ Support for search and add the device in LAN;
- ◆ Support for visit the device by DDNS;
- ◆ Support for edit and manage the device.

## 2. Obtain the software

- ◆ Obtain the “iSmartView” from attached CD.
- ◆ Search and download the “iSmartView” from Google Play.

## 3. Installation

Download “iSmartView” to mobile phone and install it. Finish the installation, it will display the icon as below:



Tips: Please ensure to finished network setting as ip camera’s user manual and can visit it by LAN or WAN before using the iSmartView.

## 4. Operation

1. Click the icon at figure 1 to launch the “iSmartView”, and then display welcome picture as figure 2;
2. Add device (prompt “Are you sure to add camera?” when first use), as figure 3;



Figure 1



Figure 2

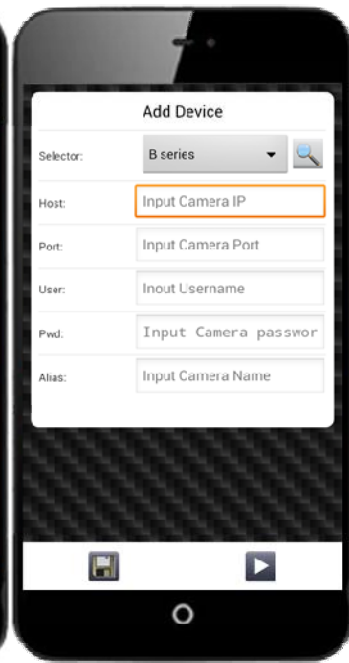


Figure 3

There are two way for adding device, that is add manually and search to add automatically.

☆ **Add device manually as the following step, example of figure 4:**

- a) Select: select correct product series you want to add;
- b) Host: input DDNS or LAN ip address;
- c) Port: input http port of the camera
- d) User: input username of the camera
- e) Pwd: input camera password
- f) Alias: input camera name

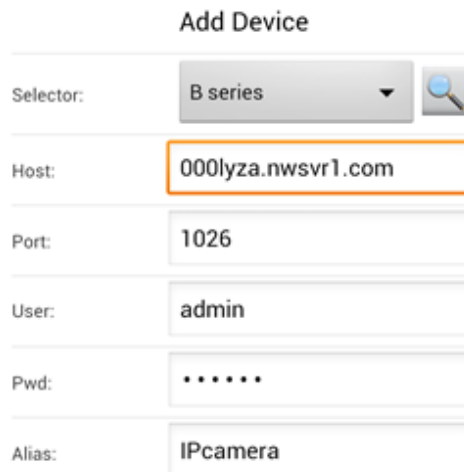


Figure 4

☆ **Search to add device automatically as below, example of figure 5:**



- a) Click  button, it will pop up device list searched when searching camera in LAN;
- b) Select the camera you want to add, will display it as figure 6, click  button, finish to add camera successfully, as figure 7;



Figure 5

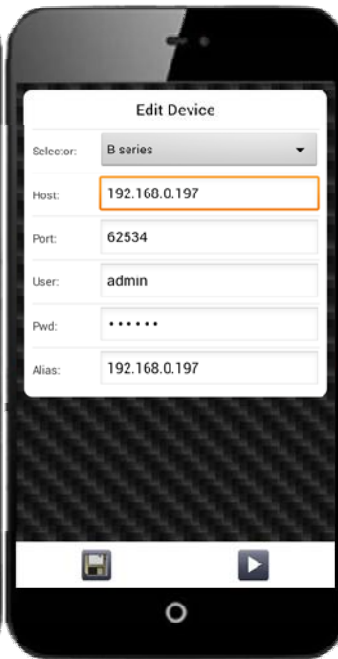







Figure 6




Figure 7

### 3. Manage the device

In Figure 7,      these buttons mean edit, add, play, delete, quit. Please ticked a device at device list at first when operating edit, play and delete.

### 4. Play control

- a) Ticked the camera you want to play, click  button to enter play interface as figure 8. You can ticked max 4 cameras at same time, but H.264 product only can ticked a camera.

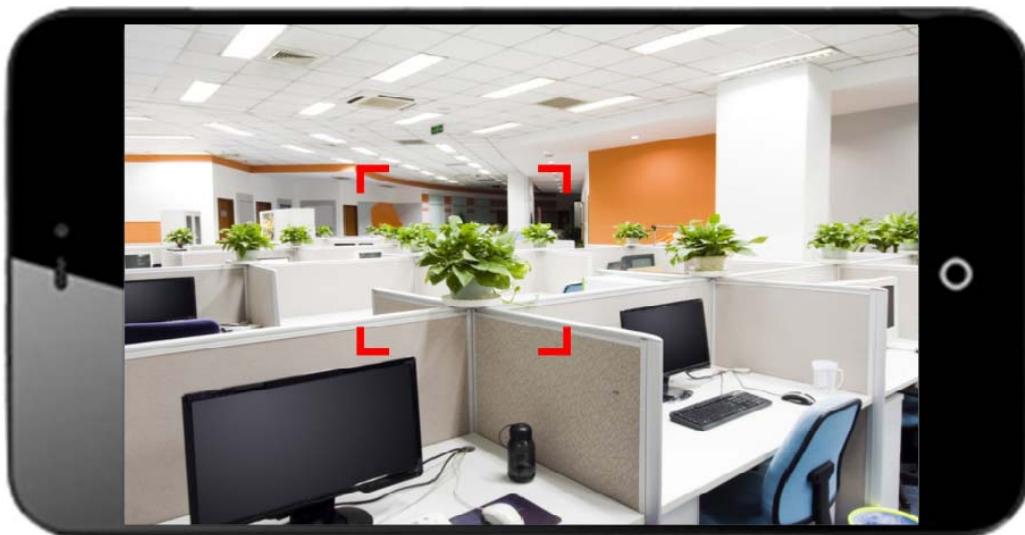


Figure 8

- b) Click the picture, it will display these buttons as below, you can perform the function for PTZ control, snapshot, monitor, talk.

